


RECOMMENDED MOUNTING INSTRUCTIONS

For Light Series 250AC

*****Proper installation of this product is the sole responsibility of the installer*****

1. Locate a flat surface and position light parallel to the ground, not upside down..
2. Use center-punch if available to start four (4) mounting holes - See diagram below. Drill the three holes out using a 3/8" drill bit.
3. Insert wire through top hole and position mounting bolts in holes.
4. Wire colors are: White (neutral), Black (hot), and Green (ground)
5. Install washers and hex nuts and tighten down mounting bolts until gasket seals light to the surface

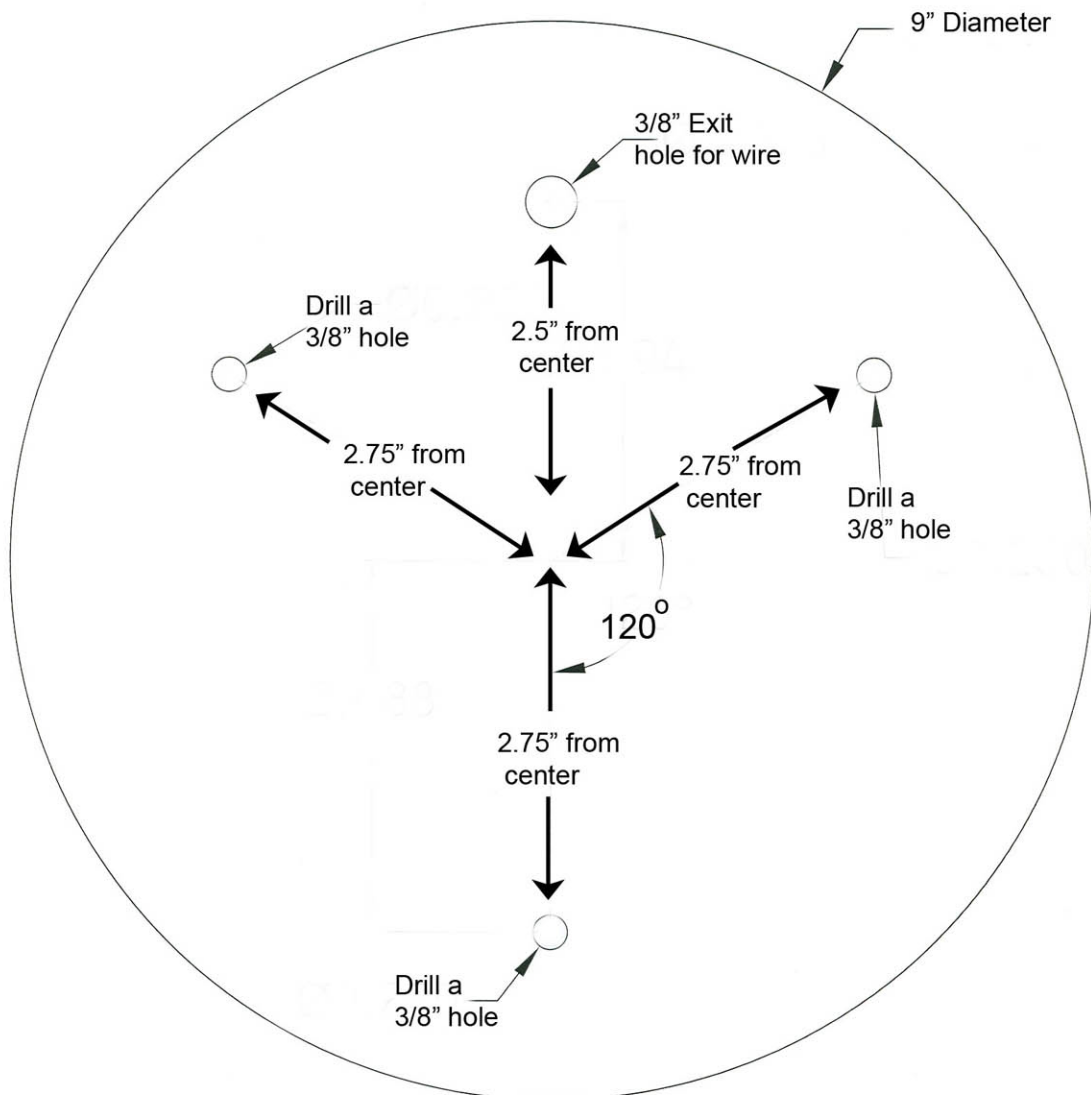

*******CLEAN LENS WITH WATER ONLY*******

DRAWING NOT TO SCALE